

Large format Printing Machines

©RIC 3.2m eco-solvent printing machine with 2/4 Epson i3200 print heads



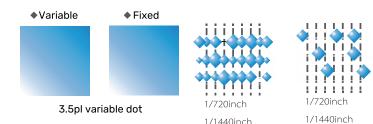



Printing Speed with 2 heads and 4 Color:

| 4pass-360x2400dpi | 52 sqm/h |
|-------------------|----------|
| 6pass-720x1800dpi | 45 sqm/h |
| 8pass-720x2400dpi | 35 sqm/h |

Printing Speed with 4 heads and 4 Color:

| 4pass-360x2400dpi | 100 sqm/h |
|-------------------|-----------|
| 6pass-720x1800dpi | 85 sqm/h |
| 8pass-720x2400dpi | 70 sqm/h |

Technical Characteristics

Intelligent inkjet printing technology and variable ink droplets ensure perfect printing output, greatly Improve the printing speed, and meet requirements of users for printing quality and speed

- 1. You can choose to set up printing automatically or manually
- 2. Feeding calibration can be used in the printing process
- 3. You can choose to control the printer from the computer or printer panel
- 4. Automatic continuous cleaning of ink tubes



Stable 3L bulk system ensures amazing printing speed



THK high-precision mute rail



Automatic moisturizing cleaning assembly ensures the stability of head cleaning and improves working stability



Heating of the bottom plate of the heads



High quality DC servo motor with good stability and long life



New pinch roller structure of three in group brings more stable feeding precision

Technical Specifications

Accessories

| | | 00.7000 | | 00.7004 | | |
|-----------------------|---------------------------|---|--|---|--|--|
| Model | | OR-3202 | | OR-3204 | | |
| Print head | | 2 i3200-E1 Print Heads 4 i3200-E1 Print Heads | | 4 i3200-E1 Print Heads | | |
| Printing Technology | | Piezoelectric Inkjet | | | | |
| Acceptable Media | Width Thickness | 3250 mm 1 mm | | | | |
| | Weight | 80 kg | | | | |
| Print Resolution | | Maximum 2400 dpi | | | | |
| Printing Width | | 210-3200 mm | | | | |
| Ink | Type Capacity Color | Eco-Solvent Ink Continual Ink Supply System (1.5L ink tank) 3L ink Tank 4 colors (Cyan, Magenta, Yellow, Black Ink) | | | | |
| | 00101 | 4 colors (cyan, Plagenta, Tellow, Black Tilk) | | | | |
| Media Heating System | | Intergrated post heater & Infrared Dryer & Fan system | | | | |
| Interface | | LAN | | | | |
| Power Supply | | AC 220V + 10%, 16A, 50/60 HZ | | | | |
| RIP | | Photo Print | | | | |
| Machine size / weight | | 4620x970x1580 mm / 780kg 4620x970x1580 mm / 800kg | | | | |
| Package size / weight | | Whole:4800x1070x1790 mm Split:4950x760x1130 mm /850kg Whole:4800x1070x1790 mm Split:5050x760x1280 mm /8 | | Whole:4800x1070x1790 mm Split:5050x760x1280 mm /880kg | | |
| Power | | Operating status:7500W | | | | |
| Environment | Power on Power off | Temperature: 59F to 90F [15C to 32C] (68 F [20C] / Humidity: 35 to 80% (no condensation) Temperature: 41F to 104F [5C to 40C] / Humidity: 20 to 80% (no condensation) | | | | |

USB cable, media clamp, manual, drain bottle, ink cartridges, RIP software, etc.