


Large format Printing Machines

ORIC 1.8m eco-solvent printing machine
with 2x Epson i3200 print heads



High-speed micro piezoelectric inkjet printing technology

2 x I3200-A1/E1




CMYK

OR-1802X is equipped with two Epson I3200-A1/E1 printing heads, which adopts advanced board control technology, and the industrial-grade design ensures the durability of the print head

OR-1602X (Epson I3200-A1/E1x2) Printing speed :

3pass-360x1200dpi	50 sqm/h
4pass-720x1200dpi	38 sqm/h
6pass-720x1800dpi	25 sqm/h

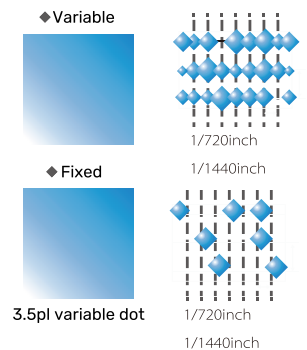

Intelligent inkjet printing technology and variable ink droplets ensure perfect printing output, greatly improve the printing speed, and meet the requirements of users for printing quality and speed

Technical Characteristics

Intelligent inkjet printing technology and variable ink droplets ensure perfect printing output, greatly improve the printing speed, and meet the requirements of users for printing quality and speed


1. You can choose to set up printing automatically or manually
2. Feeding calibration can be used in the printing process
3. You can choose to control the printer from the computer or printer panel
4. Automatic continuous cleaning of ink tubes




Stable Bulk System Ensures Amazing Printing Speed



THK high-precision mute rail

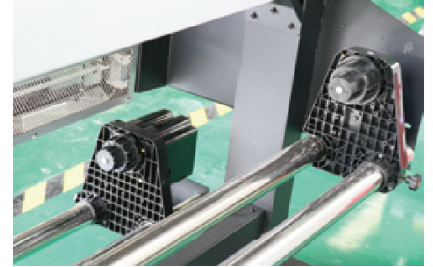


External power supply intelligent rolling system

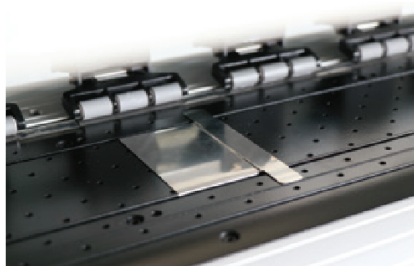

New pinch roller structure of three in group brings more stable feeding precision



High quality DC servo motor with good stability and long life

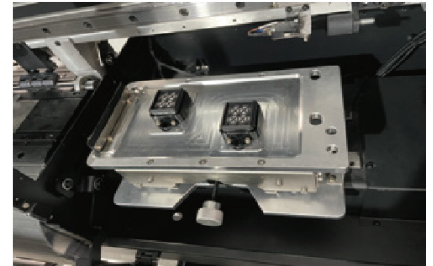

Automatic moisturizing cleaning assembly ensures the stability of head cleaning and improves working stability

TECHNICAL PARAMETER

Model		OR-1802X
Print head		Epson 13200-A1/E1 x 2
Color		CMYK
Printing mode		Piezoelectric inkjet printing
Medium	Broad width	1820 mm
	Thickness	1 mm
	Weight	60 kg
Print wide width		1800 mm
Ink cartridge	Kind	Eco Solvent Ink / Water base Dye Ink
	Capacity	Direct supply system (1.5 liter ink barrel)
Power		Operating status:6500W
Printing accuracy		2400 dpi
Port		LAN
Voltage		AC 220V ± 10%, 50/60 HZ
Software		Riprint/PhotoPrint
Machine size / weight		2800x700x1500 mm / 280KG
Packaging size / weight		2920x760x760 mm / 310KG
Environment	Power-on mode	Temperature: 15°C - 32°C / Moisture content: 35-80% (No condensation)
	Shutdown mode	Temperature: 5°C -40°C / Moisture content: 20-80% (No condensation)
Attachment		Data cable, paper press, user manual, waste ink cartridge, ink cartridge, RIP software, etc.